



# GSR225



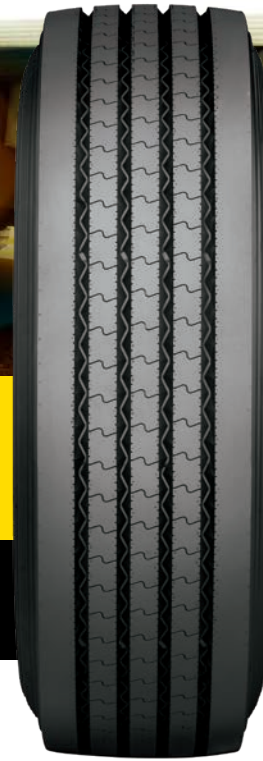
Trucks & Commercial Light Trucks, All Position








Regional



Urban | Light Duty



## Regional All Position Tire

Features	Benefits
 <p>Four belt construction</p>	Increases casing and tread stiffness, minimizing tire deformation for longer wear
 <p>Specially formulated tread compound</p>	Improved tread wear resistance and handling characteristics
 <p>Resilient and proven four groove tread design</p>	Provides consistent handling and vehicle control
 <p>Optimized sipe design on rib edges</p>	Improved wet traction and minimized irregular wear
 <p>New, improved bead construction</p>	Improved bead design for easier rim mounting

Tire Size	Item Code	PR	LR	LI/SR	Approved Wheel	Allowed Wheel	Max Load Single	Max Load Dual	Section Width	Static Loaded Radius	Overall Diameter	Tread Depth	RPM	Weight
					mm	mm	(kg@kPa)	(kg@kPa)		mm		mm		mm
225/70R19.5	100EV656Q	14	G	128/126 L	171	152	1801@758	1701@758	226	378	810	16	651	30
245/70R19.5	100EV664Q	16	H	136/134 M	191	171	2241@827	2121@827	249	389	838	18	630	36
265/70R19.5	100EV1461Q	16	H	140/138 M	191	210	2499@793	2361@793	262	401	866	18	609	39
275/70R22.5	100EV776Q	16	H	148/145 M (152/148 J)	210	229	3150@896	2901@896	277	445	958	19	551	52
315/80R22.5	100EV1980Q	20	L	158/150 L (154/150 M)	229	248	4250@903	3352@903	312	500	1077	21	490	68

PR Ply Rating    LR Load Range    LI Load Index    SR Speed Rating    RPM Revolutions Per Mile

Product details given for information only. Giti reserves the right to modify details of products and services at any time and without notice.



COMMERCIAL TRUCK TIRES